


ACCU-PULSE III Pulsation Dampeners

Chargeable / Plastic / Dome Top

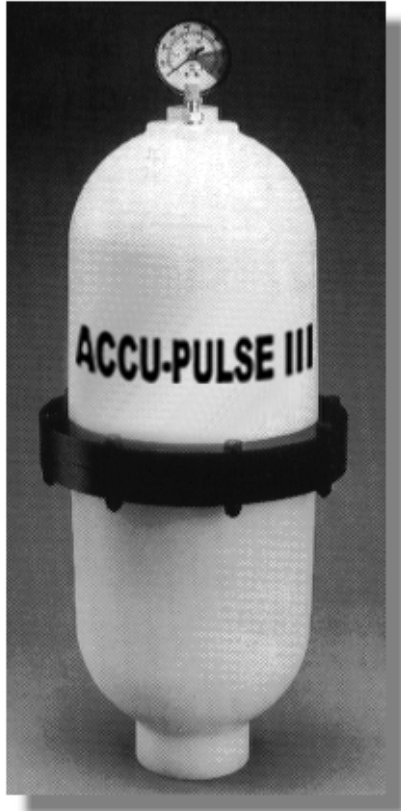

- remove pulsating flows from positive displacement pumps
- increase system efficiency and pump life
- decrease maintenance and costs
- protect pipes, meters, instruments, valves, gaskets and seals from pulsation and vibration
- ensure meter accuracy, longevity and repeatability
- reduce pressure fluctuations and diaphragm wear
- prevent foaming and splashing

FEATURES

- lightweight, compact design
- 300 psi rating
- extensive range of materials
- easy in-line maintenance
- 2 year warranty

Technical Data

Unit Capacity:	370 CU In	Weight:	14-17 pounds
Air Control:	Gas Fill Valve		
Inlet Port:	2" NPTF		
Pressure Limit:	150 psi at 70° F **		
Shell Materials:	Polypropylene, PVC, PVDF		
Elastomers:	Neoprene, Buna-N, EPDM, Viton, Hypalon, Teflon		

**Caution: Temperature and pressure affect the strength and chemical resistance of plastic and rubber.


www.hydramet.com.au

ACCU-PULSE III Pulsation Dampeners


Operation:

ACCU-Pulse pulsation dampeners operate on the principal that volume is inversely proportional to pressure. Compressed air or gas is introduced into the top section of ACCU-Pulse to a specified pressure that must be lower than the pump's discharge pressure. When a pump or valve introduces a pulse, fluid enters the dampener and compresses the trapped gas. The fluid remains in the dampener until the system pressure returns to normal, when the valve is reopened or the pump begins its next cycle. The fluid is then pushed back into the system piping as the trapped gas expands. ACCU-Pulse does NOT restrict fluid flow, or increase system pressure. ACCU-Pulse fills the fluid voids and pressure fluctuations created by reciprocating pumps.

Typical Installations:

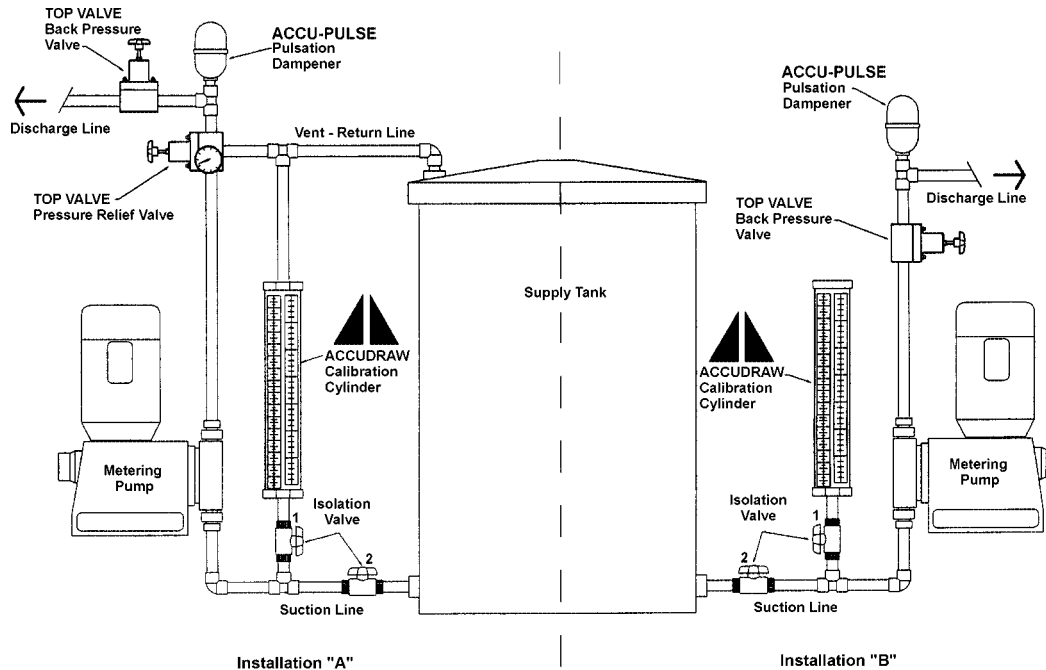

Dimensions:

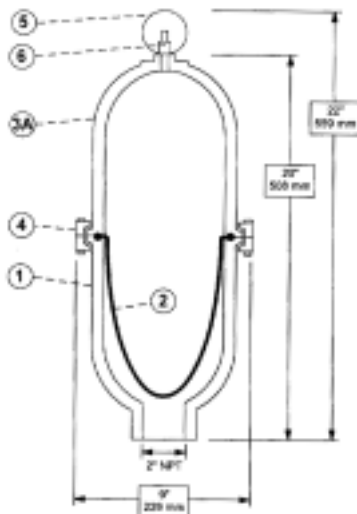

Parts Description:

Item	Part #	Qty	Description	Material
1	111-27	1	Wetted Housing	PVC
	101-27		Wetted Housing	GF Polypropylene
	201-27-^		Wetted Housing	PVDF
± 2	101-25	1	Bladder	Neoprene
	201-28		Bladder	EPDM
	201-29		Bladder	Buna-N
	201-30		Bladder	Hypalon
	201-25		Bladder	Viton
	101-55		Bladder	Aflas
	101-10		Bladder	Teflon
3A	111-24	1	NonWetted Housing	PVC
	101-24^^		NonWetted Housing	GF Polypropylene
4	105-26	1	Ring Band Assembly	GF Noryl
± 5	101-33	1	Gauge	Plastic / Brass
± 6	101-70	1	Fill Valve	Brass

^ add suffix for Wetted Housing and Teflon Bladder APIIIIF only
^^ used with Polypropylene and PVDF units
± Recommended Spare Parts



Western Region
(08) 9412 6100
hydramet@hydramet.com.au

Central Region
(08) 8374 7800
hydrasa@hydramet.com.au

Eastern Region
(03) 9325 3900
hydravic@hydramet.com.au

www.hydramet.com.au